

START

USE THE SB2+ POWER ADAPTOR CABLE ONLY WITH THE SB2+



cable is not compatible with other devices

SB2+ MODEM IS ACTIVE AND ONLINE

1



remove the protective plastic wrap and **POWER ON THE ARIA2210**

2



hold reset for 10 seconds until light slowly flashes white

CONNECT ARIA2210 TO SB2+ MODEM
using the LAN1 port

3



BRIDGE MODE AUTO-ENABLED ON SB2+

4 modem reboot may take up to 5 minutes

proceed when modem returns to online status

CONNECT WIRELESSLY TO HITRON SSID


5



once connected, you will be redirected to "Easyconnect Flow" splash page


EASYCONNECT FLOW

6

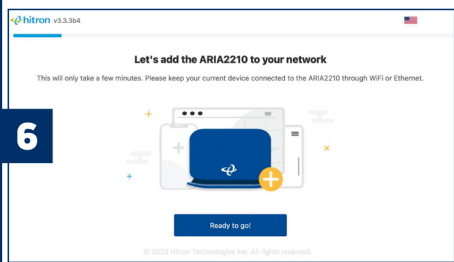

EASYCONNECT FLOW


7

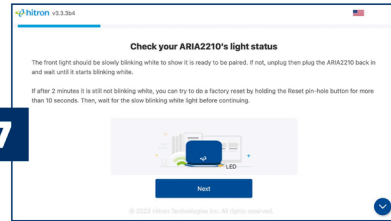

If not blinking white, perform a factory reset by holding the Reset button for more than 10 seconds

EASYCONNECT FLOW

8




!!!IMPORTANT!!!
Select ROUTER

DO NOT SELECT EXTENDER


EASYCONNECT FLOW

9

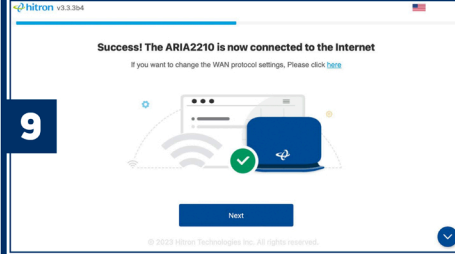


EASYCONNECT FLOW

10

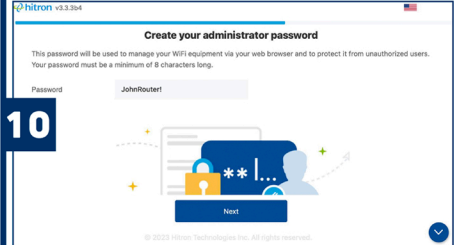


EASYCONNECT FLOW

11

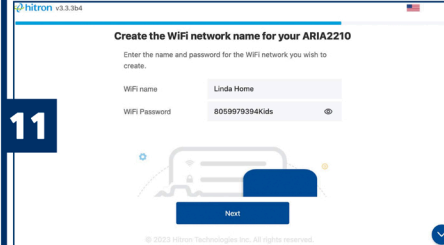

EASYCONNECT FLOW

12

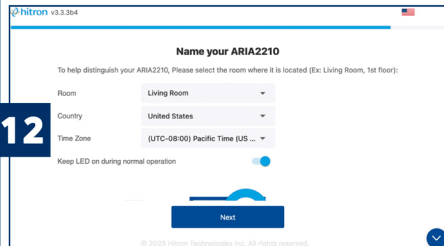

EASYCONNECT FLOW

13




device may take a moment to reset, then **CONNECT TO NEW SSID**

14



and verify internet access!

USE THE SB2+ POWER ADAPTOR CABLE ONLY WITH THE SB2+

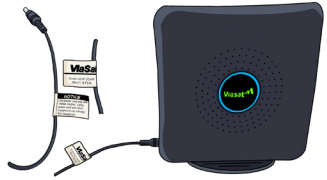


cable is not compatible with other devices

END

START


**USE THE SB2+ POWER ADAPTOR
CABLE ONLY WITH THE SB2+**

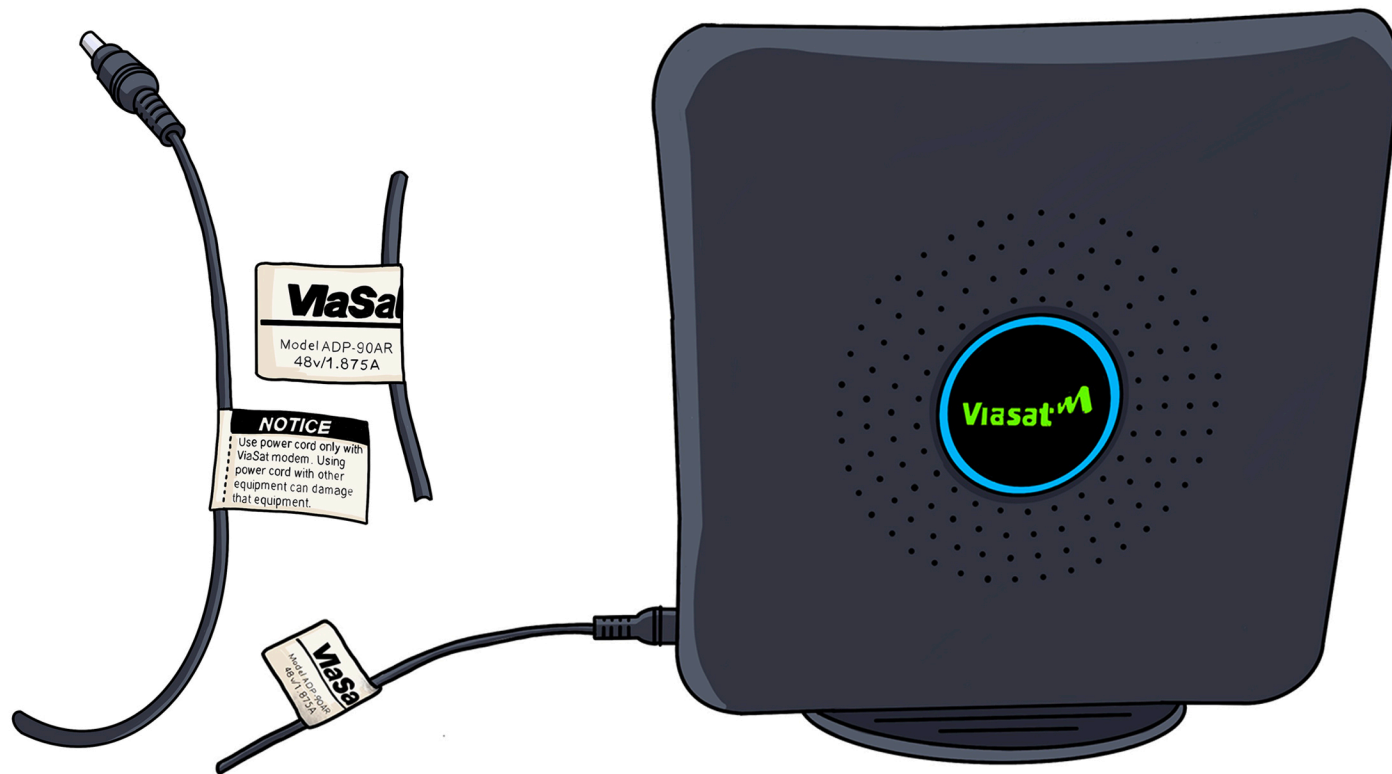

cable is not compatible with other devices

SB2+ MODEM IS ACTIVE AND ONLINE


1

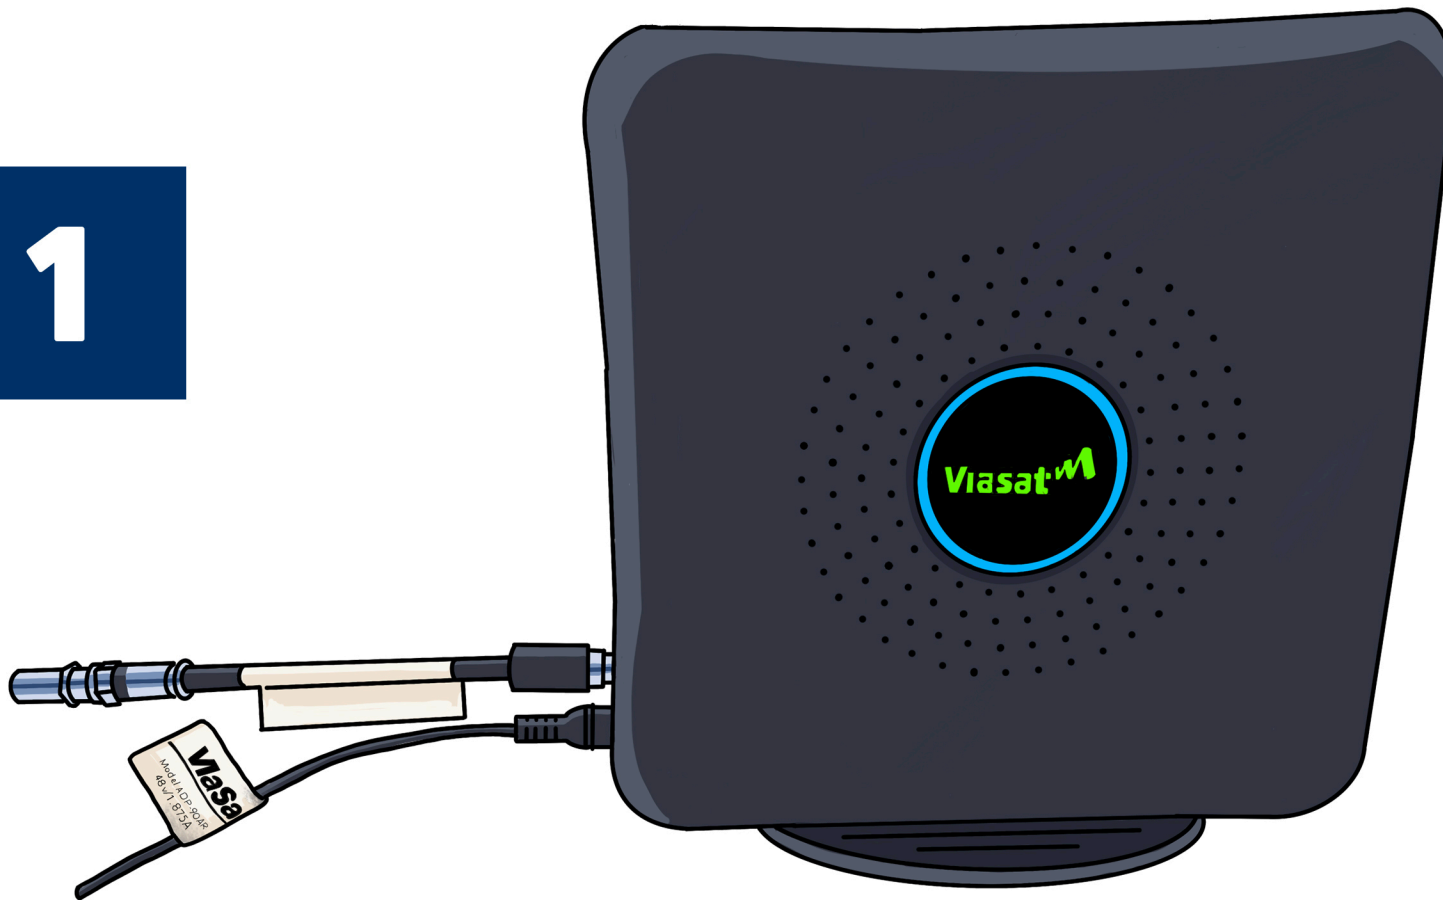

remove the protective plastic wrap and

POWER ON THE ARIA2210

2

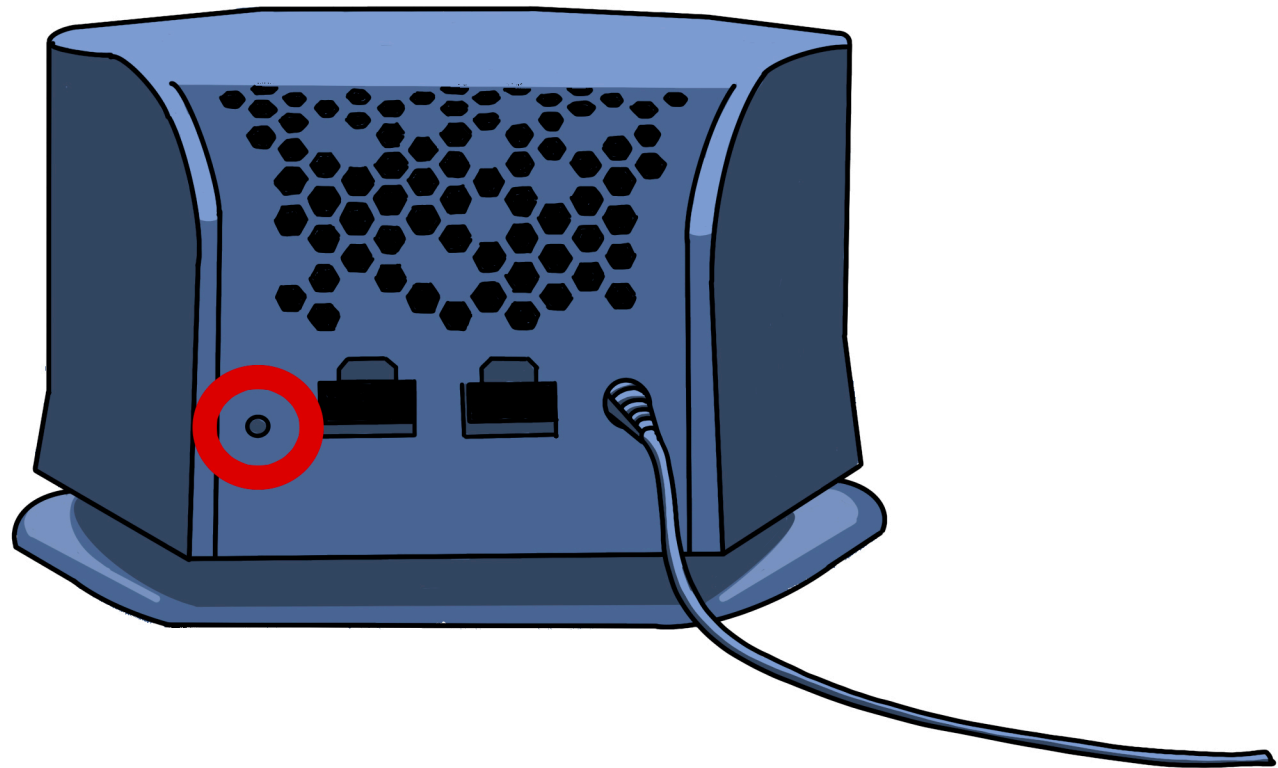


hold reset for 10 seconds until light slowly flashes white

CONNECT ARIA2210 TO SB2+ MODEM

using the LAN1 port

3

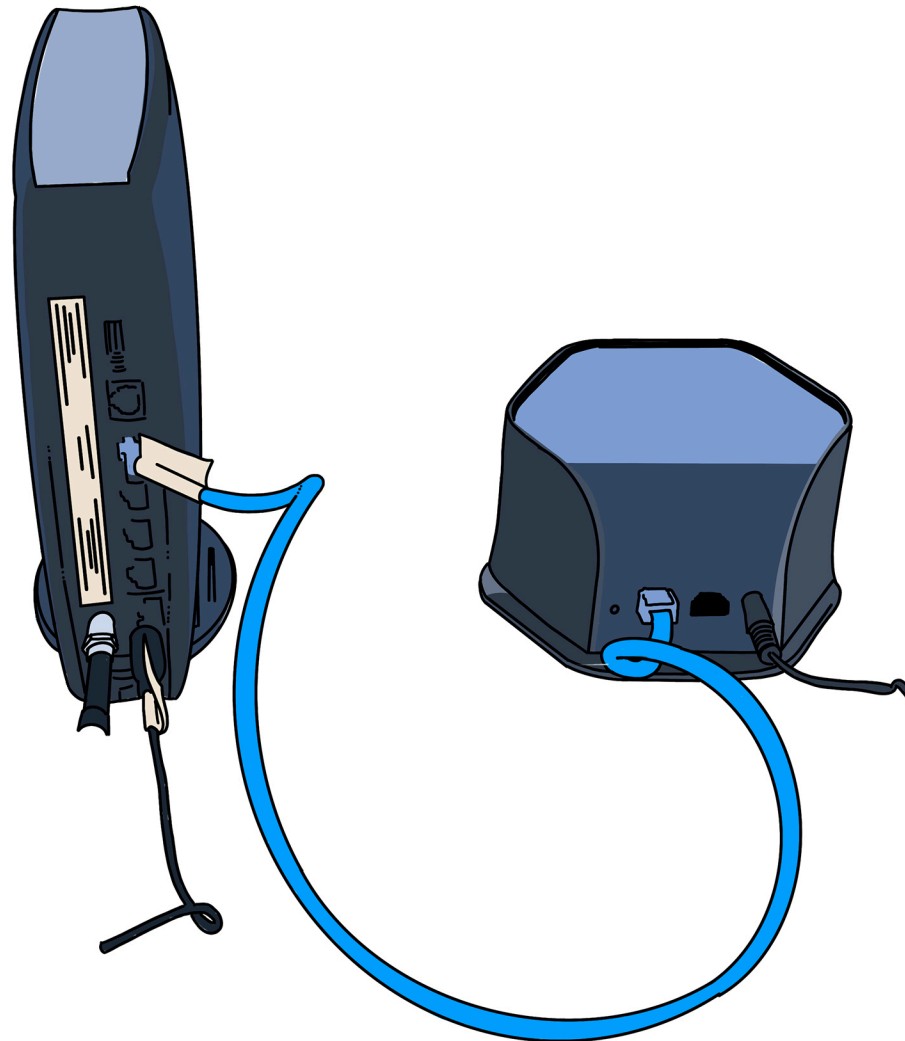

BRIDGE MODE AUTO-ENABLED ON SB2+

4


**modem reboot may take
up to 5 minutes**

**proceed when modem
returns to online status**

CONNECT WIRELESSLY TO HITRON SSID

5

once connected, you
will be redirected to
"Easyconnect Flow"
splash page

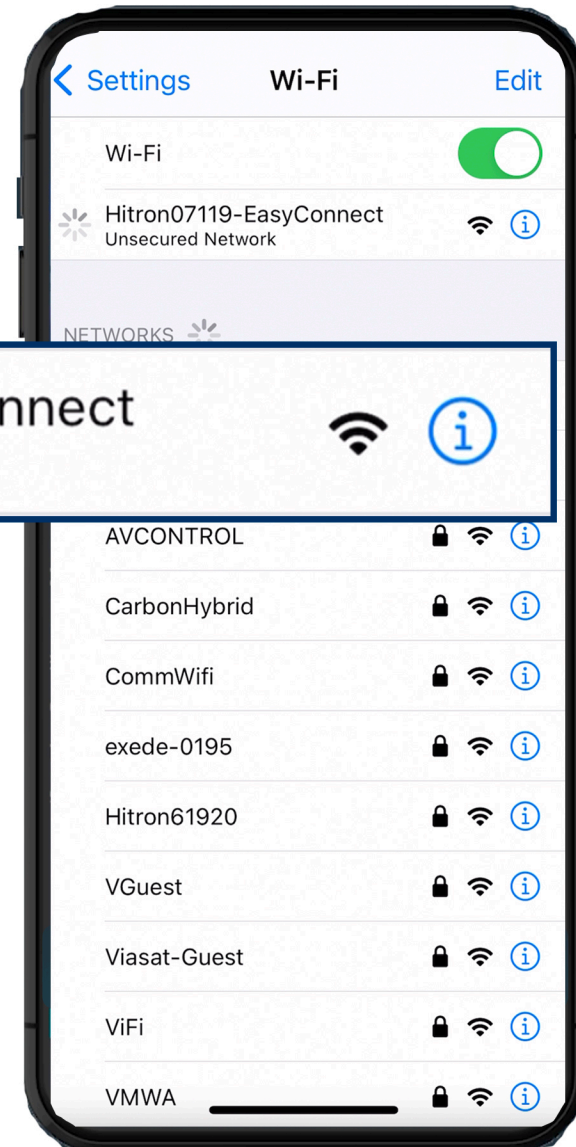

✓ Hitron07119-EasyConnect
Unsecured Network

EASYCONNECT FLOW

hitron v3.3.3b4



Let's add the ARIA2210 to your network

This will only take a few minutes. Please keep your current device connected to the ARIA2210 through WiFi or Ethernet.



6

Ready to go!

© 2023 Hitron Technologies Inc. All rights reserved.

EASYCONNECT FLOW

hitron v3.3.3b4



Check your ARIA2210's light status

The front light should be slowly blinking white to show it is ready to be paired. If not, unplug then plug the ARIA2210 back in and wait until it starts blinking white.

If after 2 minutes it is still not blinking white, you can try to do a factory reset by holding the Reset pin-hole button for more than 10 seconds. Then, wait for the slow blinking white light before continuing.



Next

© 2023 Hitron Technologies Inc. All rights reserved.



7

If not blinking white, perform a factory reset by holding the Reset button for more than 10 seconds

EASYCONNECT FLOW

8

Do you want to configure this device as a router or an extender?



Configure as a router

When configured as a router, this ARIA2210 should be plugged into your modem with an Ethernet cable. It will act as the control center of your WiFi network.

Select this option if you do not already have a router in your network.



Configure as an extender

When configured as an extender, this ARIA2210 will extend the coverage of your WiFi network and provide a better wireless experience.

!!!IMPORTANT!!!

Select
ROUTER

**DO NOT SELECT
EXTENDER**

EASYCONNECT FLOW

hitron v3.3.3b4



Success! The ARIA2210 is now connected to the Internet

If you want to change the WAN protocol settings, Please click [here](#)



9

Next

© 2023 Hitron Technologies Inc. All rights reserved.



EASYCONNECT FLOW

hitron v3.3.3b4



Create your administrator password

This password will be used to manage your WiFi equipment via your web browser and to protect it from unauthorized users. Your password must be a minimum of 8 characters long.

Password

JohnRouter!

10



Next

© 2023 Hitron Technologies Inc. All rights reserved.



EASYCONNECT FLOW

hitron v3.3.3b4



Create the WiFi network name for your ARIA2210

Enter the name and password for the WiFi network you wish to create.

WiFi name

Linda Home

WiFi Password

8059979394Kids



Next

© 2023 Hitron Technologies Inc. All rights reserved.



11

EASYCONNECT FLOW

hitron v3.3.3b4



Name your ARIA2210

To help distinguish your ARIA2210, Please select the room where it is located (Ex: Living Room, 1st floor):

Room

Living Room



Country

United States



Time Zone

(UTC-08:00) Pacific Time (US ...



Keep LED on during normal operation



Next

© 2023 Hitron Technologies Inc. All rights reserved.



12

EASYCONNECT FLOW

hitron v3.3.3b4



ARIA2210 - (Living Room) is now good to go

Please use the following WiFi name and password to connect devices to your network.

WiFi name

Linda Home

Password

8059979394Kids

Your ARIA will reboot to apply the settings. You can close this page.



© 2023 Hitron Technologies Inc. All rights reserved.



13

device may take a
moment to reset, then


CONNECT TO NEW SSID

14



and verify internet access!

USE THE SB2+ POWER ADAPTOR CABLE ONLY WITH THE SB2+

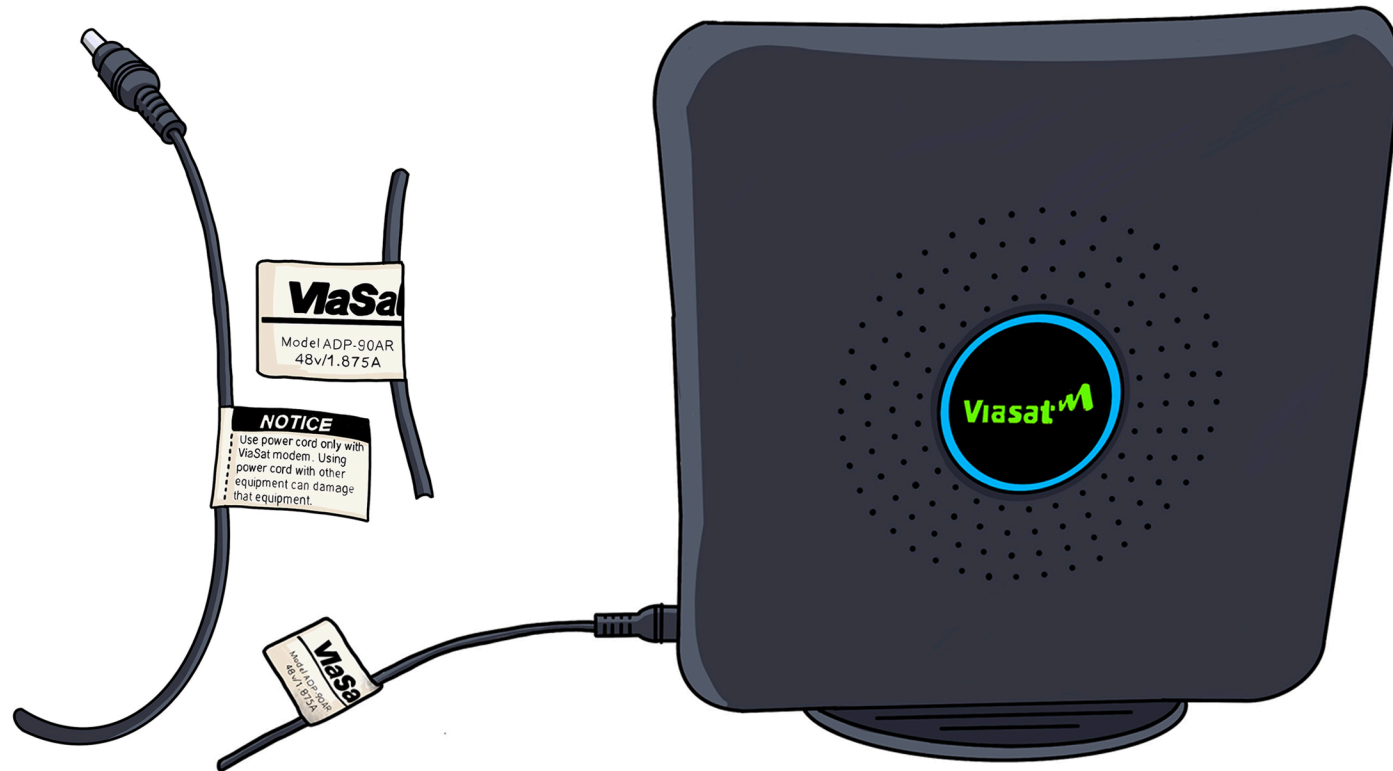

cable is not compatible with other devices

END